




BERTO Panel (Integrated)

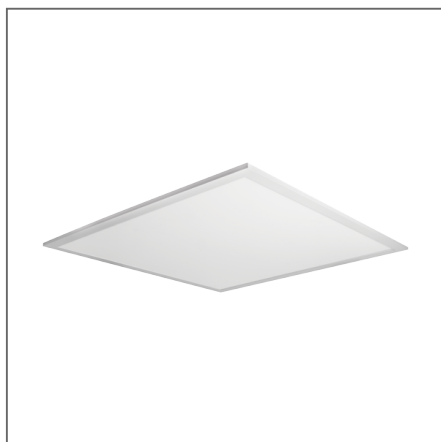

Integrated LED Luminaire
F33400RCv2

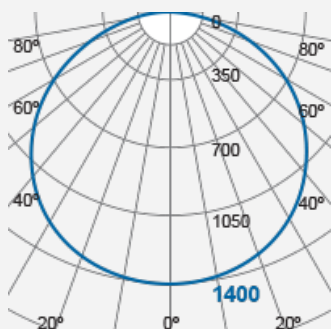

Product Code:

F33400RCv2

Electrical Data

Nominal Voltage (V)	DC 47-51V
Input Current (mA)	900

Product Data

Product Wattage (W)	44
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PS diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11070, LA11065
Weight (g)	2778
Application	Classrooms, Conference Rooms, Corridors, Offices

Performance Data

Luminous Flux (lm)	3800 [3000K], 4100 [4000K], 4300 [6000K]
Luminous Efficacy (lm/W)	86 [3000K], 93 [4000K], 98 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20

Product Dimensions

Length (mm)	595
Width (mm)	595
Height (mm)	9

Remarks: Accessories for BERTO LED Panel: LA10025 4-wire Suspension Kits, LA10027 Surface Mounted Kits, LA10029 Ceiling Frame, LA10031 Security Chain

Product Code: F33400RCv2

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.
www.megaman.cc

m	Lux	Ø cm
0.5	5600	173
1	1400	346
1.5	622	520
2	350	693

Beam angle = 120°