
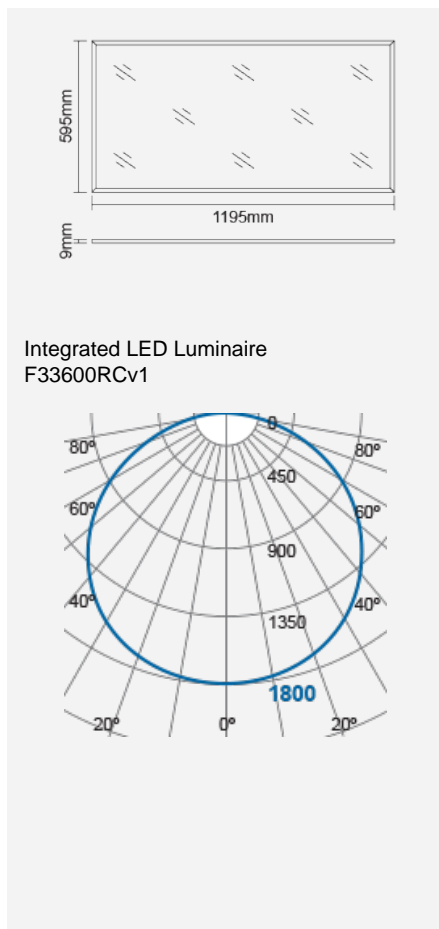
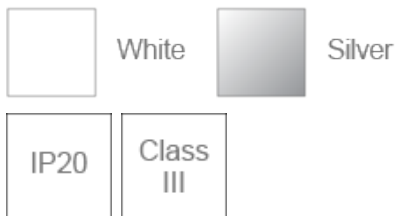


# BERTO Panel (Integrated) - High Output

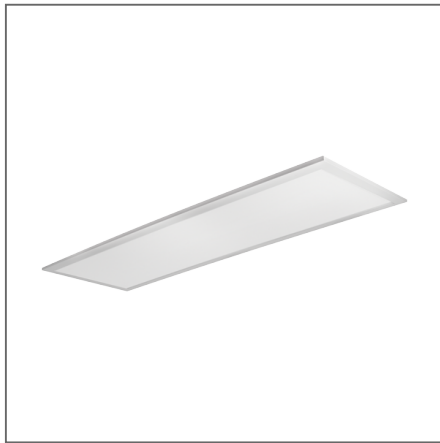

Product Code:

**F33600RCv1**


Electrical Data	
Nominal Voltage (V)	DC 35-39V
Input Current (mA)	1400
Product Data	
Product Wattage (W)	51
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PS diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11071, LA11066
Weight (g)	5870
Application	Classrooms, Conference Rooms, Corridors, Offices
Performance Data	
Luminous Flux (lm)	4700 [3000K], 5100 [4000K], 5500 [6000K]
Luminous Efficacy (lm/W)	90 [3000K], 98 [4000K], 106 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	1195
Width (mm)	595
Height (mm)	9
Remarks: Accessories for BERTO LED Panel: LA10026 6-wire Suspension Kits, LA10028 Surface Mounted Kits (with 6 hook kits), LA10031 Security Chain	

Product Code: F33600RCv1

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)



m	Lux	Ø cm
0.5	7200	173
1	1800	346
1.5	800	520
2	450	693

Beam angle = 120°