

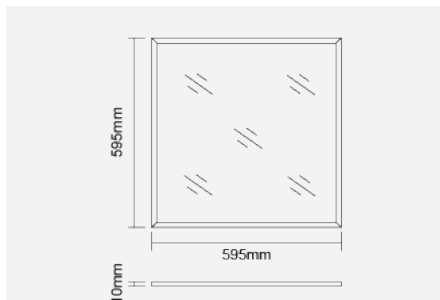


BERTO Panel (Integrated) - Prismatic Diffuser

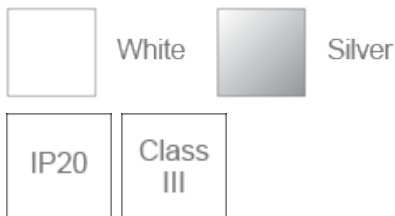

Integrated LED Luminaire
F53700RC



Product Code:

F53700RC

Electrical Data	
Nominal Voltage (V)	DC 29-33V
Input Current (mA)	1400
Product Data	
Product Wattage (W)	43
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PMMA diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11019, LA11049
Weight (g)	3723
Application	Classrooms, Conference Rooms, Corridors, Offices
Performance Data	
Luminous Flux (lm)	3800 [3000K], 4100 [4000K], 4300 [6000K]
Luminous Efficacy (lm/W)	88 [3000K], 95 [4000K], 100 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	595
Width (mm)	595
Height (mm)	10
Remarks: Accessories for BERTO LED Panel: LA10011 4-wire Suspension Kits LA10012 6-wire Suspension Kits LA10013 Surface Mounted Kits LA10014 Surface Mounted Kits (with 6 hook kits)	

Product Code: F53700RC

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

m	Lux	Ø cm
0.5	5600	173
1	1400	346
1.5	622	520
2	350	693

Beam angle = 120°

Product Code: F53700RC

MEGAMAN® 2005-2018. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc