BERTO Panel (Integrated) - Prismatic Diffuser

White

Silver

IP20

Class III

Integrated LED Luminaire
F53800RC



Product Code:

F53800RC

Electrical Data	
Nominal Voltage (V)	DC 33-40V
Input Current (mA)	900
Product Data	
Product Wattage (W)	33
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PMMA diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11020, LA11051
Weight (g)	8130
Application	Classrooms, Conference Rooms, Corridors, Offices
Performance Data	
Luminous Flux (lm)	3300 [3000K], 3400 [4000K], 3600 [6000K]
Luminous Efficacy (lm/W)	100 [3000K], 103 [4000K], 109 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	1195
Width (mm)	595
Height (mm)	10

Remarks: Accessories for BERTO LED Panel: LA10011 4-wire Suspension Kits LA10012 6-wire Suspension Kits LA10013 Surface Mounted Kits LA10014 Surface Mounted Kits (with 6 hook kits)

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.
MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.
www.megaman.cc

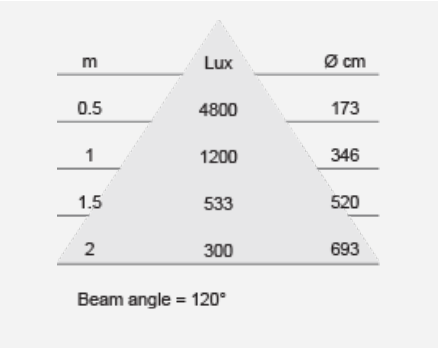

Product Code: F53800RC

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.
MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.