



F61100SM





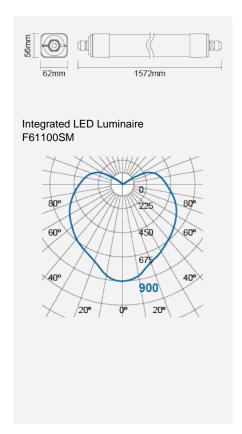

Product Code:

F61100SM

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	35
Beam Angle (°)	160
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	Ra80
Colour	Silver (SV16)
Materials	Polycarbonate with clear prismatic diffuser
Protection Class	Class II
Dimmable	No
Application	Car parks, Underground Areas, Warehouses, Workshops
Performance Data	
Luminous Flux (lm)	3500 [3000K], 3600 [4000K]
Luminous Efficacy (Im/W)	100 [3000K], 103 [4000K]
Rated Life (hrs)	50000 hrs at L80, B10 at Ta 25 ° C
IP Rating	IP66
Product Dimensions	
Length (mm)	1572
Width (mm)	62
Height (mm)	56

Product Code: F61100SM



m	Lux	Øcm
0.5	3600	567
1	900	1134
1.5	400	1701
2	225	2269