

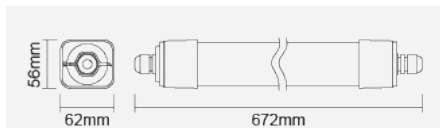


# DINO 2 Waterproof Batten (Integrated) - Clear Prismatic Diffuser Options



Integrated LED Luminaire  
FOB60900v0-pl

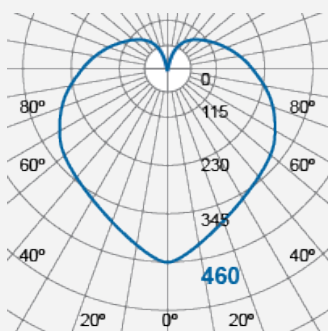

Product Code:

**FOB60900v0-pl**


Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	19.5
Beam Angle ( ° )	160
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	Ra80
Colour	Silver (SV16)
Materials	Polycarbonate with clear prismatic diffuser
Protection Class	Class II
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	690
Application	Car parks, Underground Areas, Warehouses, Workshops
Performance Data	
Luminous Flux (lm)	1750 [3000K], 1800 [4000K]
Luminous Efficacy (lm/W)	90 [3000K], 92 [4000K]
Rated Life (hrs)	50000
IP Rating	IP66
Product Dimensions	
Length (mm)	672
Width (mm)	62
Height (mm)	56

Product Code: FOB60900v0-pl

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

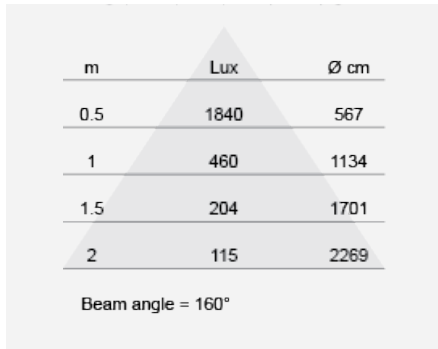

m	Lux	Ø cm
0.5	1840	567
1	460	1134
1.5	204	1701
2	115	2269

Beam angle = 160°