

DINO 2 Waterproof Batten (Integrated) - Opal Prismatic Diffuser Options - Permanent Live




Silver


IP66

IK08

Class II



Integrated LED Luminaire
FOB61400v0-pl

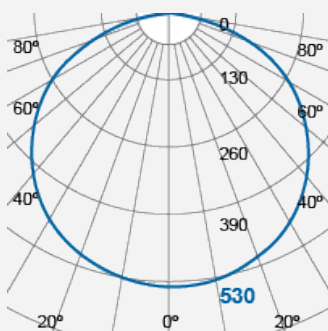

Product Code:

FOB61400v0-pl


| Electrical Data | |
|--------------------------|---|
| Voltage (V) | 220-240V |
| Power Factor | >0.9 |
| Product Data | |
| Product Wattage (W) | 19.5 |
| Beam Angle (°) | 120 |
| Colour Temperature (K) | Warmwhite (3000K), Coolwhite (4000K) |
| Colour Render Index (Ra) | Ra80 |
| Colour | Silver (SV16) |
| Materials | Polycarbonate with opal prismatic diffuser |
| Protection Class | Class II |
| Dimmable | No |
| Application | Car parks, Underground Areas, Warehouses, Workshops |
| Performance Data | |
| Luminous Flux (lm) | 1750 [3000K], 1800 [4000K] |
| Luminous Efficacy (lm/W) | 90 [3000K], 92 [4000K] |
| Rated Life (hrs) | 50000 hrs at L80, B10 at Ta 25 ° C |
| IP Rating | IP66 |
| Product Dimensions | |
| Length (mm) | 672 |
| Width (mm) | 62 |
| Height (mm) | 56 |

Product Code: FOB61400v0-pl

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

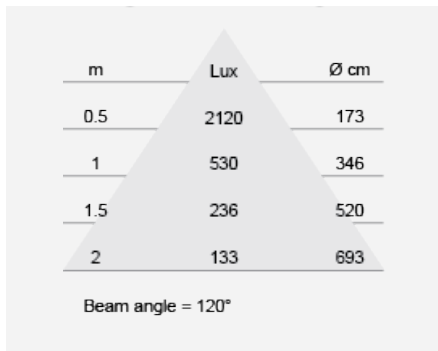

| m | Lux | Ø cm |
|-----|------|------|
| 0.5 | 2120 | 173 |
| 1 | 530 | 346 |
| 1.5 | 236 | 520 |
| 2 | 133 | 693 |

Beam angle = 120°