



ESTA Track Lighting (Integrated)





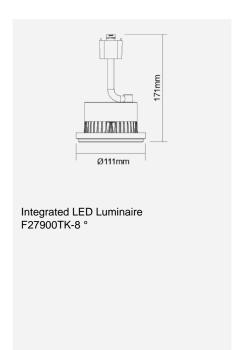


Product Code:

F27900TA

Electrical Data		
Voltage (V)	220-240V	
Product Data		
Product Wattage (W)	15	
Beam Angle (°)	8, 24, 45	
Rotating Angle (°)	330	
Tilting Angle (°)	± 90	
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K)	
Colour Render Index (Ra)	Ra82 [2800K], Ra85 [4000K]	
Colour	White (WH12), Black (BK12)	
Materials	Aluminium housing with diffuser	
Protection Class	Class II	
Dimmable	No	
Application	Homes, Galleries and Museums, Hotels, Restaurants, Shops and Boutiques	
Performance Data		
Max. Luminous Intensity (cd)	20000 [8 °], 5000 [24 °], 2000 [45	
Luminous Flux (lm)	950	
Luminous Efficacy (lm/W)	63	
Rated Life (hrs)	25000	
IP Rating	IP20	
Product Dimensions		
Diameter (mm)	111	
Height (mm)	171	


Product Code: F27900TA





Beam angle = 8°

F27900TK-24 °



m	Lux	Ø cm
0.5	20000	21
1	5000	43
1.5	2222	64
2	1250	85
Beam angle = 24°		

F27900TK-45°



