



LUSTER-LED Suspended Luminaire (Integrated)





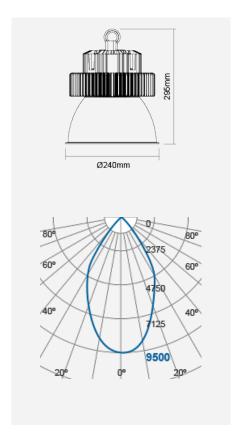

Product Code:

F52400SU

Electrical Data		
Voltage (V)	220-240V	
Power Factor	>0.9	
Product Data		
Product Wattage (W)	110	
Beam Angle (°)	60, 90	
Colour Temperature (K)	Coolwhite (4000K)	
Colour Render Index (Ra)	>Ra80	
Colour	Silver (SV26)	
Materials	Aluminium housing and plastic reflector	
Protection Class	Class I	
Dimmable	No	
Application	Exhibitions, Halls, High-ceilings, Manufacturing Bays, Trade Fairs, Warehouses	
Performance Data		
Max. Luminous Intensity (cd)	9500 (60 °), 6500 (90 °)	
Luminous Flux (lm)	11000	
Luminous Efficacy (Im/W)	100	
Rated Life (hrs)	50000	
IP Rating	IP65	
Product Dimensions		
Diameter (mm)	240	
Height (mm)	295	
Remarks: LA0105 - Cover for all	uminium reflector	

Product Code: F52400SU



m	_ Lux _	Ø cm
0.5	38000	58
_1/	9500	115
1.5	4222	173
2	2375	231
Beam angle =	: 60°	