



# MALO Batten (Integrated) - Permanent Live Option

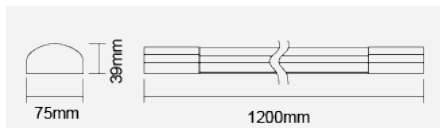

Integrated LED Luminaire  
FIB70100v0-pl



Product Code:

**FIB70100v0-pl**


Electrical Data	
Voltage (V)	220-240V
Product Data	
Product Wattage (W)	25
Beam Angle ( ° )	110
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6500K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH12)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	720
Application	Cabinets, Corridors and Staircases, Factories, Residential, Warehouses
Performance Data	
Luminous Flux (lm)	2500
Luminous Efficacy (lm/W)	100
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	1200
Width (mm)	75
Height (mm)	39
<p>Remarks: Permanent Live Option: 3-wire connection, allows unswitched live supply to the luminaire or appliances (i.e. CCTV, security alarm system, smoke detector, etc.) when the switch is off. Application with Emergency Lighting: Non-maintained emergency luminaires stay connected and charge on the permanent live, while the general lighting can work as usual on the switched circuit. In the event of power failure, the emergency units light up on their internal batteries.</p>	

Product Code: FIB70100v0-pl

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

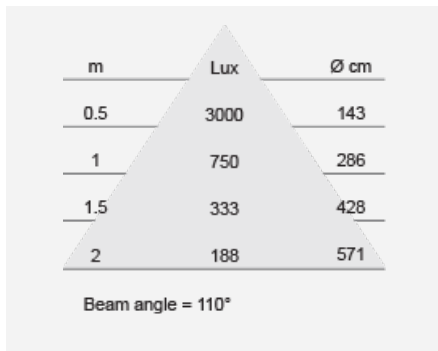

m	Lux	Ø cm
0.5	3000	143
1	750	286
1.5	333	428
2	188	571

Beam angle = 110°