


PINO Batten (Integrated)




White



Class
II

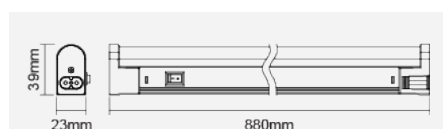

Integrated LED Luminaire
F29100SM-3000K



Product Code:

F29100SM

Electrical Data

Voltage (V)	220-240V
-------------	----------

Product Data

Product Wattage (W)	17
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH13)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Weight (g)	226
Application	Office, Display Shelves, Light Troughs, Shops and Boutiques, Wall Lighting

Performance Data

Luminous Flux (lm)	1600 [3000K], 1700 [4000K]
Luminous Efficacy (lm/W)	94 [3000K], 100 [4000K]
Rated Life (hrs)	25000
IP Rating	IP20

Product Dimensions

Length (mm)	880
Width (mm)	23
Height (mm)	39

Remarks: Accessory: LA8002 Power Cord LA8003 150mm Patch Cord LA8004 Angle Joint LA8005 Mounting Clips (Comes with the MEGAMAN® PINO)

Product Code: F29100SM

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.


www.megaman.cc

Page 1 of 2

m	Lux	Ø cm
0.5	1400	173
1	350	346
1.5	156	520
2	88	693

Beam angle = 120°

F29100SM-4000K



m	Lux	Ø cm
0.5	1480	173
1	370	346
1.5	164	520
2	93	693

Beam angle = 120°

Product Code: F29100SM

MEGAMAN® 2005-2018. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc