


PINOLITE Batten (Integrated)



White

IK03	IP20	Class II
------	------	----------

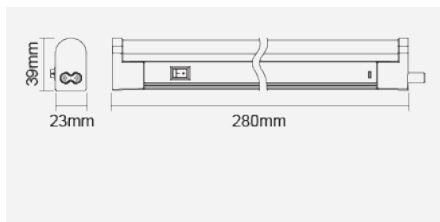

Product Code:

FIB71400v0

Electrical Data	
Voltage (V)	220-240V
Product Data	
Product Wattage (W)	3.5
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight(6500K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH13)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Application	Office, Display Shelves, Light Troughs, Shops and Boutiques, Wall Lighting
Performance Data	
Luminous Flux (lm)	300 [3000K], 320 [4000K/6500K]
Luminous Efficacy (lm/W)	86 [3000K], 91 [4000K/6500K]
Rated Life (hrs)	35000 hrs at L70 B50 at Ta 25 ° C (hrs)
IP Rating	IP20
Product Dimensions	
Length (mm)	280
Width (mm)	23
Height (mm)	39
Remarks: Accessories: LA8002 1.8 Power Cord LA8036 150mm Patch Cord LA8004 Angle Joint for PINOLITE LA8005 Mounting Clips (Comes with the MEGAMAN® PINOLITE) LA8039 Female pole protective cap	

Product Code: FIB71400v0

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc