

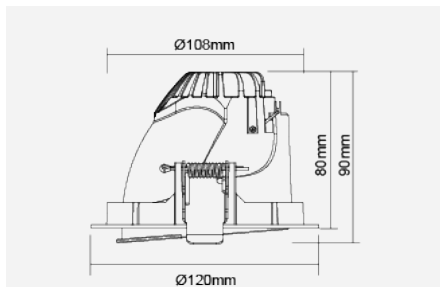


# CARLO Mini Adjustable Recessed Downlight (MHx)

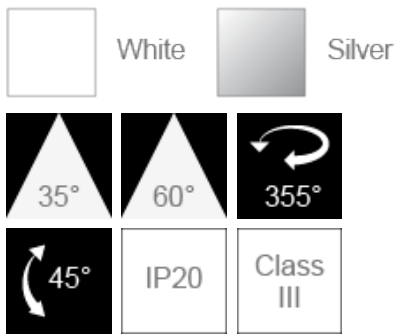

Luminaire with LED Module TECOH® MHx MH0219 (500mA)  
F51548RC-35 °

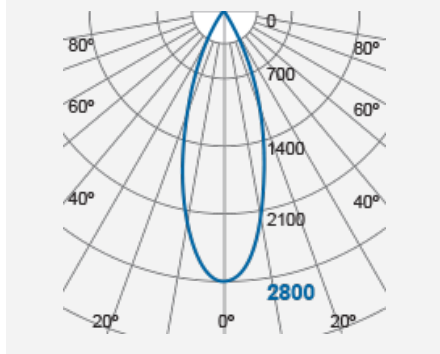

Product Code:

**F51548RC**

Product Data	
Product Wattage (W)	19
Light Source	TECOH® MHx MH0219 with input current 500mA
Beam Angle ( ° )	35, 60
Rotating Angle ( ° )	355
Tilting Angle ( ° )	45
Colour	White (WH26), Silver (SV26)
Materials	Metal housing
Protection Class	Class III
Dimmable	N/A
Weight (g)	431
Application	Commercial buildings, Department Stores, Exhibition Booths, Galleries and Museums, Shops and Boutiques
Performance Data	
IP Rating	IP20
Product Dimensions	
Diameter (mm)	120
Height (mm)	90
Cut-out (mm)	Ø108
Remarks: Capable of linear dimming when working with DALI, DSI or 1-10V dimming driver, and the dimming performance depends on the specification of driver. The wattage declared is the wattage of the luminaire without driver; the system wattage will be dependent on driver choice. Different reflectors options available: LA3113 35 ° Reflector, LA3114 60 ° Reflector	

Product Code: F51548RC

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.


MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

m	Lux	Ø cm
0.5	11200	32
1	2800	63
1.5	1244	95
2	700	126

Beam angle = 35°

F51548RC-60 °



m	Lux	Ø cm
0.5	6800	58
1	1700	115
1.5	756	173
2	425	231

Beam angle = 60°