



## SIENA SR Recessed Downlight (Integrated)





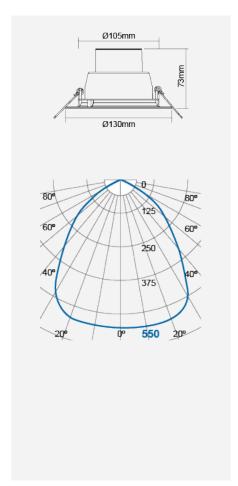

## Product Code:

## F54000RC

Electrical Data		
Voltage (V)	220-240V	
Power Factor	otor >0.9	
Product Data		
Product Wattage (W)	6	
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K), Daylight (6500K)	
Colour Render Index (Ra)	>Ra80	
Colour	White (WH26), Silver (SV26)	
Materials	Die-cast aluminium trim with specular reflector	
Protection Class	Class II	
Dimmable	No	
Performance Data		
Luminous Flux (lm)	550	
Luminous Efficacy (Im/W)	92	
Rated Life (hrs)	50000	
IP Rating	IP44	
Product Dimensions		
Diameter (mm)	130	
Height (mm)	73	
Cut-out (mm)	Ø130	
Remarks: UGR 22 Shielding Angle: Up to 25 °		

Product Code: F54000RC



m	Lux	Ø cm
0.5	2200	100
1	550	200
1.5	244	300
2	138	400
Beam and	ale = 90°	