



# U-DIM-SIENA FR Recessed Downlight (Integrated) DIMMABLE

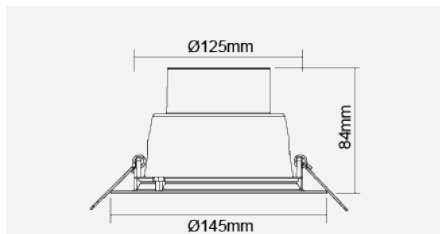

Integrated LED Luminaire  
F54600RC-d

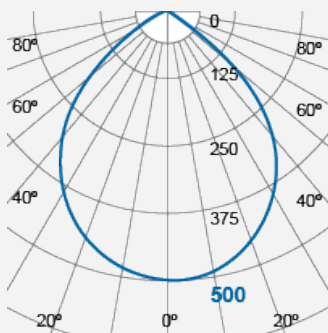

Product Code:

**F54600RC-d**

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	10.5
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K), Daylight (6500K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV26)
Materials	Die-cast aluminium trim with specular reflector
Protection Class	Class II
Dimmable	100-5%
Performance Data	
Luminous Flux (lm)	950
Luminous Efficacy (lm/W)	90
Rated Life (hrs)	50000
IP Rating	IP44
Product Dimensions	
Diameter (mm)	145
Height (mm)	84
Cut-out (mm)	Ø125
Remarks: UGR 22 Shielding Angle: Up to 25 ° Capable of linear dimming from 100% to 5% when working with most conventional dimmers.	

## Technologies




Compatible with the widest range of existing dimmers, whether they are leading-edge or trailing edge dimmers, with enhanced dimming range of 100% to 5%.

Product Code: F54600RC-d

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)



m	Lux	Ø cm
0.5	2000	100
1	500	200
1.5	222	300
2	125	400

Beam angle = 90°