


SIENA FR Recessed Downlight (Integrated)





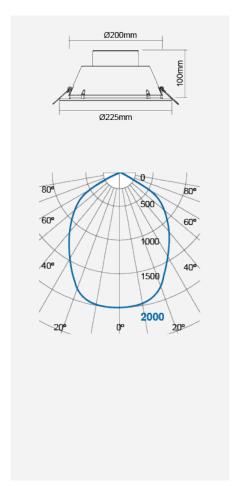

Product Code:

F54800RC

| Electrical Data | |
|------------------------------------------------|--------------------------------------------------------|
| Voltage (V) | 220-240V |
| Power Factor | >0.9 |
| Product Data | |
| Product Wattage (W) | 19 |
| Colour Temperature (K) | Warmwhite (2800K), Coolwhite (4000K), Daylight (6500K) |
| Colour Render Index (Ra) | >Ra80 |
| Colour | White (WH26), Silver (SV26) |
| Materials | Die-cast aluminium trim with specular reflector |
| Protection Class | Class II |
| Dimmable | No |
| Performance Data | |
| Luminous Flux (lm) | 2000 |
| Luminous Efficacy (Im/W) | 105 |
| Rated Life (hrs) | 50000 |
| IP Rating | IP44 |
| Product Dimensions | |
| Diameter (mm) | 225 |
| Height (mm) | 100 |
| Cut-out (mm) | Ø200 |
| Remarks: UGR 22 Shielding Angle: Up to 25 ° | |

Product Code: F54800RC



| m | Lux | Ø cm |
|-----|------|------|
| 0.5 | 8000 | 100 |
| 1 | 2000 | 200 |
| 1.5 | 889 | 300 |
| 2 | 500 | 400 |