
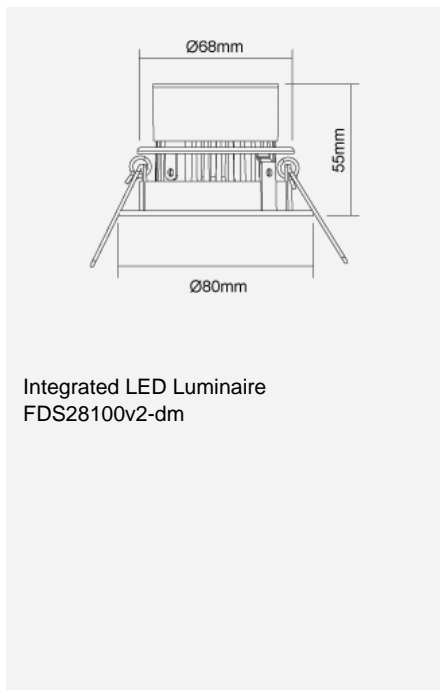


# SIENA 2.5" CoverPlus Recessed Downlight (Integrated) - U-DIM



Product Code:

**FDS28100v2-dm**

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.85
Product Data	
Product Wattage (W)	6
Beam Angle ( ° )	36
Tilting Angle ( ° )	25
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Materials	Metal housing with optical reflector
Protection Class	Class II
Dimmable	100-5%
Application	Retail, Bathrooms, Hotels, Kitchens, Offices, Restaurants
Performance Data	
Max. Luminous Intensity (cd)	1800
Luminous Flux (lm)	500
Luminous Efficacy (lm/W)	83
Rated Life (hrs)	50000hrs at L70 B50 at Ta25 ° C (25000hrs use directly under thermal insulation)
IP Rating	IP44
Product Dimensions	
Diameter (mm)	80
Height (mm)	55
Cut-out (mm)	Ø68
Remarks: Capable of linear dimming from 100% to 5% when working with most conventional dimmers. Can be mounted directly in insulated ceilings without any recess box to prevent contact with thermal insulation.	

Product Code: FDS28100v2-dm

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

## Technologies



Compatible with the widest range of existing dimmers, whether they are leading-edge or trailing edge dimmers, with enhanced dimming range of 100% to 5%.

