


TOTT S Floodlight (Integrated) - IP54

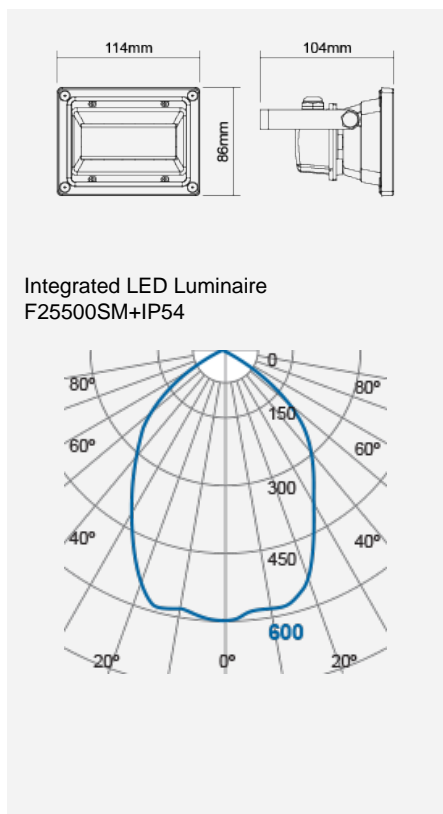

Product Code:

F25500SM+IP54

| Electrical Data | |
|------------------------------|--|
| Voltage (V) | 220-240V |
| Product Data | |
| Product Wattage (W) | 12 |
| Beam Angle (°) | 80 |
| Tilting Angle (°) | 180 |
| Colour Temperature (K) | Warmwhite (3000K), Coolwhite (4000K) |
| Colour Render Index (Ra) | Ra80 |
| Colour | Silver (SV26), Black (BK23) |
| Materials | Aluminium |
| Protection Class | Class I |
| Dimmable | No |
| Weight (g) | 370 |
| Application | Billboards, Gate areas, Pillar Facades, Signages |
| Performance Data | |
| Max. Luminous Intensity (cd) | 600 |
| Luminous Flux (lm) | 900 |
| Luminous Efficacy (lm/W) | 75 |
| Rated Life (hrs) | 25000 |
| IP Rating | IP54 |
| Product Dimensions | |
| Length (mm) | 114 |
| Width (mm) | 86 |
| Height (mm) | 104 |

Product Code: F25500SM+IP54

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

| m | Lux | Ø cm |
|-----|------|------|
| 0.5 | 2400 | 84 |
| 1 | 600 | 165 |
| 1.5 | 267 | 252 |
| 2 | 150 | 336 |

Beam angle = 80°