



TOTT L Floodlight (Integrated) - IP54





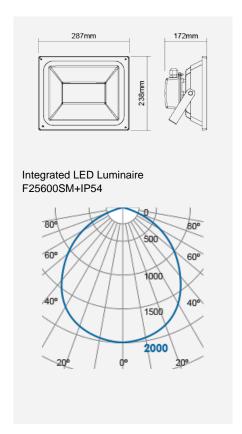

Product Code:

F25600SM+IP54

Electrical Data		
Voltage (V)	220-240V	
Power Factor	>0.9	
Product Data		
Product Wattage (W)	60	
Beam Angle (°)	100	
Tilting Angle (°)	180	
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)	
Colour Render Index (Ra)	Ra80	
Colour	Silver (SV26), Black (BK23)	
Materials	Aluminium	
Protection Class	Class I	
Dimmable	No	
Weight (g)	2728	
Application	Billboards, Gate areas, Pillar Facades, Signages	
Performance Data		
Max. Luminous Intensity (cd)	2000	
Luminous Flux (lm)	4200	
Luminous Efficacy (Im/W)	70	
Rated Life (hrs)	25000	
IP Rating	IP54	
Product Dimensions		
Length (mm)	287	
Width (mm)	238	
Height (mm)	172	

Product Code: F25600SM+IP54



m	Lux	Ø cm
0.5	8000	119
1_/	2000	238
1.5	889	358
2	1025	477
Beam ang	le = 100°	