
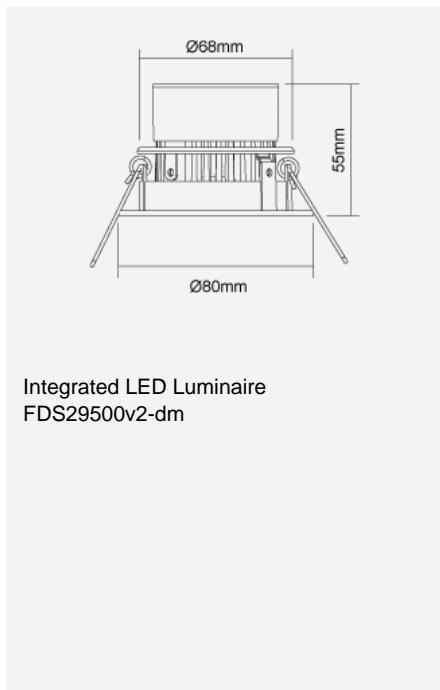



SIENA 2.5" CoverPlus Recessed Downlight (Integrated) - U-DIM

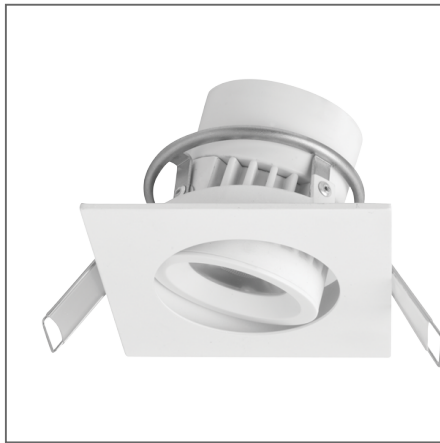

Product Code:

FDS29500v2-dm

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.85
Product Data	
Product Wattage (W)	6
Beam Angle (°)	36
Tilting Angle (°)	25
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Materials	Metal housing with optical reflector
Protection Class	Class II
Dimmable	100-5%
Application	Retail, Bathrooms, Hotels, Kitchens, Offices, Restaurants
Performance Data	
Max. Luminous Intensity (cd)	1800
Luminous Flux (lm)	500
Luminous Efficacy (lm/W)	83
Rated Life (hrs)	50000hrs at L70 B50 at Ta25 ° C (25000hrs use directly under thermal insulation)
IP Rating	IP44
Product Dimensions	
Length (mm)	80
Width (mm)	80
Height (mm)	55
Cut-out (mm)	Ø68
Remarks: Capable of linear dimming from 100% to 5% when working with most conventional dimmers. Can be mounted directly in insulated ceilings without any recess box to prevent contact with thermal insulation.	

Product Code: FDS29500v2-dm

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

Technologies



Compatible with the widest range of existing dimmers, whether they are leading-edge or trailing edge dimmers, with enhanced dimming range of 100% to 5%.

