



# SIENA FR Recessed Downlight (Integrated)

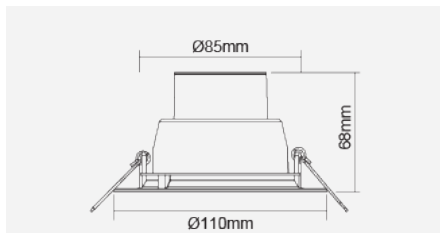

Integrated LED Luminaire  
FDS54400v0



Product Code:

**FDS54400v0**


| Electrical Data                                |   |
|--|---|
| Voltage (V)                                    | 220-240V  |
| Product Data                                   |   |
| Product Wattage (W)                            | 4   |
| Beam Angle ( ° )                               | 90  |
| Colour Temperature (K)                         | Warmwhite (2800K), Coolwhite (4000K), Daylight (6500K)    |
| Colour Render Index (Ra)                       | Ra80  |
| Materials                                      | Die-cast aluminium trim with facet reflector              |
| Protection Class                               | Class II  |
| Dimmable                                       | No  |
| Operating Temperature                          | -30 ° C to +40 ° C  |
| Weight (g)                                     | 160   |
| Application                                    | Retail, Bathrooms, Hotels, Kitchens, Offices, Restaurants |
| Performance Data                               |   |
| Luminous Flux (lm)                             | 350   |
| Luminous Efficacy (lm/W)                       | 88  |
| Rated Life (hrs)                               | 50000   |
| IP Rating                                      | IP44  |
| Product Dimensions                             |   |
| Diameter (mm)                                  | 110   |
| Height (mm)                                    | 68  |
| Cut-out (mm)                                   | Ø85   |
| Remarks: UGR 22<br>Shielding Angle: Up to 25 ° |   |

Product Code: FDS54400v0

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

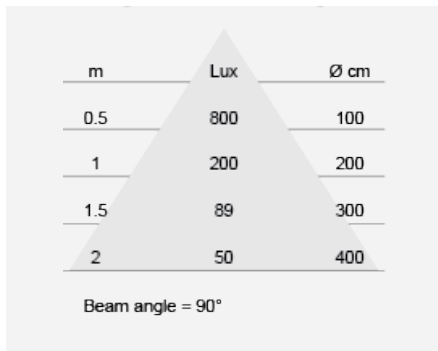

| m   | Lux | Ø cm |
|-----|-----|------|
| 0.5 | 800 | 100  |
| 1   | 200 | 200  |
| 1.5 | 89  | 300  |
| 2   | 50  | 400  |

Beam angle = 90°