

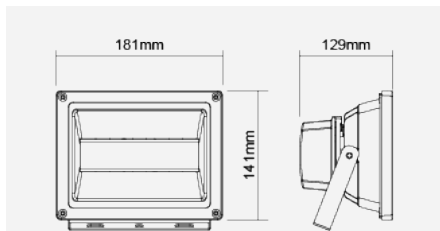


TOTT M Floodlight (Integrated) - IP65

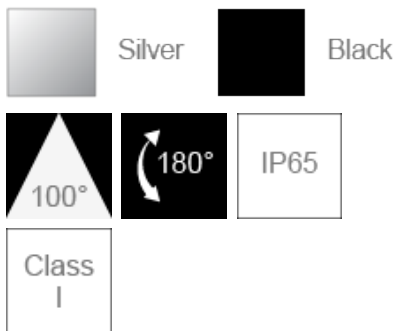

Integrated LED Luminaire
F25400SM+IP65

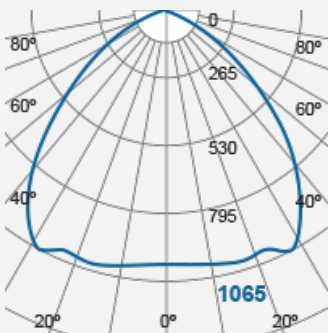

Product Code:

F25400SM+IP65

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	33
Beam Angle (°)	100
Tilting Angle (°)	180
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	Ra80
Colour	Silver (SV26), Black (BK23)
Materials	Aluminium
Protection Class	Class I
Dimmable	No
Weight (g)	1210
Application	Billboards, Gate areas, Pillar Facades, Signages
Performance Data	
Max. Luminous Intensity (cd)	1065
Luminous Flux (lm)	2300
Luminous Efficacy (lm/W)	70
Rated Life (hrs)	25000
IP Rating	IP65
Product Dimensions	
Length (mm)	181
Width (mm)	141
Height (mm)	129

Product Code: F25400SM+IP65

MEGAMAN® 2005-2019. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

m	Lux	Ø cm
0.5	4260	119
1	1065	238
1.5	473	358
2	266	477

Beam angle = 100°

Product Code: F25400SM+IP65

MEGAMAN® 2005-2019. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc