



DINO 2 Waterproof Batten (Integrated) - Clear Prismatic Diffuser Options





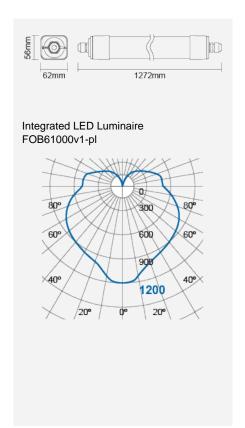

Product Code:

FOB61000v1-pl

Electrical Data		
Voltage (V)	220-240V	
Power Factor	>0.9	
Product Data		
Product Wattage (W)	41.5	
Beam Angle (°)	160	
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)	
Colour Render Index (Ra)	Ra80	
Colour	Silver (SV16)	
Materials	Polycarbonate with clear prismatic diffuser	
Protection Class	Class II	
Dimmable	No	
Operating Temperature	-30 ° C to +40 ° C	
Weight (g)	1322	
Application	Car parks, Underground Areas, Warehouses, Workshops	
Performance Data		
Luminous Flux (Im)	4150 [3000K], 4300 [4000K]	
Luminous Efficacy (Im/W)	100 [3000K], 104 [4000K]	
Rated Life (hrs)	50000	
IP Rating	IP66	
Product Dimensions		
Length (mm)	1272	
Width (mm)	62	
Height (mm)	56	

Product Code: FOB61000v1-pl



m	Lux	Øcm
0.5	4800	567
1	1200	1134
1.5	533	1701
2	300	2269