

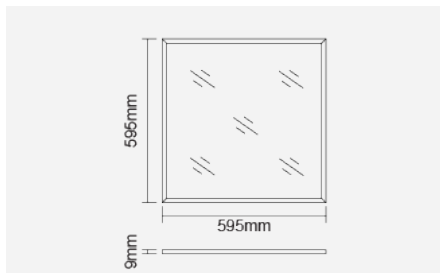
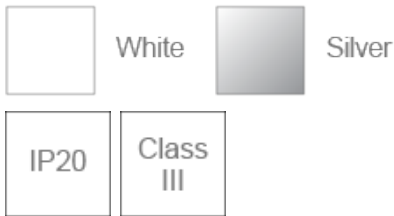


BERTO Panel (Integrated)

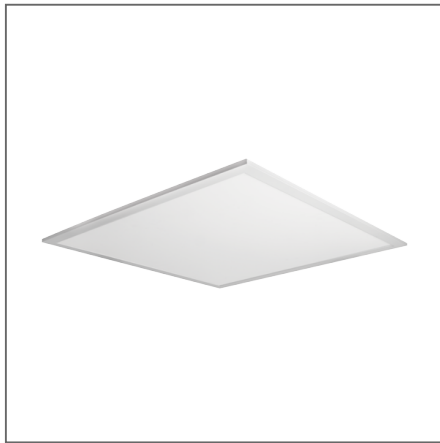

Integrated LED Luminaire
F33400RC

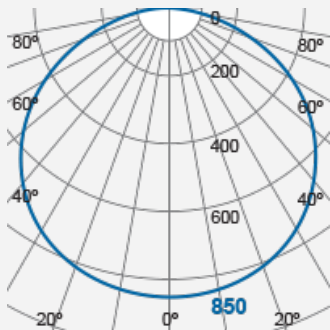

Product Code:

F33400RC


Electrical Data	
Nominal Voltage (V)	DC 35-39V
Input Current (mA)	700
Product Data	
Product Wattage (W)	26
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PS diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11072, LA11063
Weight (g)	2758
Application	Classrooms, Conference Rooms, Corridors, Offices
Performance Data	
Luminous Flux (lm)	2400 [3000K], 2600 [4000K], 2700 [6000K]
Luminous Efficacy (lm/W)	92 [3000K], 100 [4000K], 104 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	595
Width (mm)	595
Height (mm)	9
Remarks: Accessories for BERTO LED Panel: LA10025 4-wire Suspension Kits, LA10027 Surface Mounted Kits, LA10029 Ceiling Frame, LA10031 Security Chain	

Product Code: F33400RC

MEGAMAN® 2005-2019. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc



m	Lux	Ø cm
0.5	3400	173
1	850	346
1.5	378	520
2	213	693

Beam angle = 120°

Product Code: F33400RC

MEGAMAN® 2005-2019. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc