

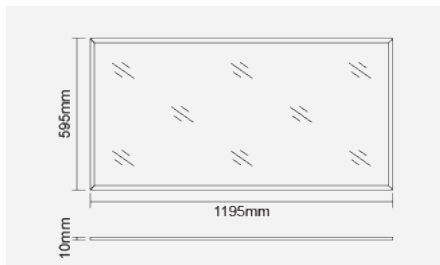


# BERTO Panel (Integrated) - Prismatic Diffuser, High Output

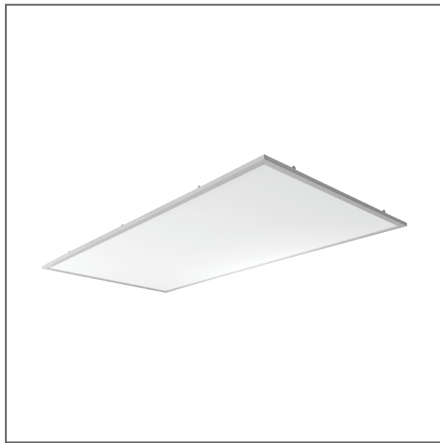

Integrated LED Luminaire  
F53800RCv1



Product Code:

**F53800RCv1**

Electrical Data	
Nominal Voltage (V)	DC 33-40V
Input Current (mA)	1400
Product Data	
Product Wattage (W)	51
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K), Daylight (6000K)
Colour Render Index (Ra)	>Ra80
Colour	White (WH26), Silver (SV63)
Materials	Aluminium frame and PMMA diffuser
Protection Class	Class III
Dimmable	Yes
Suggested Driver	LA11021, LA11022
Weight (g)	8120
Application	Classrooms, Conference Rooms, Corridors, Offices
Performance Data	
Luminous Flux (lm)	4500 [3000K], 4700 [4000K], 5000 [6000K]
Luminous Efficacy (lm/W)	88 [3000K], 92 [4000K], 98 [6000K]
Rated Life (hrs)	50000
IP Rating	IP20
Product Dimensions	
Length (mm)	1195
Width (mm)	595
Height (mm)	10
Remarks: Accessories for BERTO LED Panel: LA10011 4-wire Suspension Kits LA10012 6-wire Suspension Kits LA10013 Surface Mounted Kits LA10014 Surface Mounted Kits (with 6 hook kits)	

Product Code: F53800RCv1

MEGAMAN® 2005-2019. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.megaman.cc](http://www.megaman.cc)

m	Lux	Ø cm
0.5	7200	173
1	1800	346
1.5	800	520
2	450	693

Beam angle = 120°