

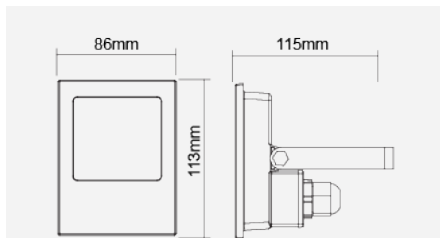


TOTT S Floodlight (Integrated) - IP65



Integrated LED Luminaire
FFL70300v0

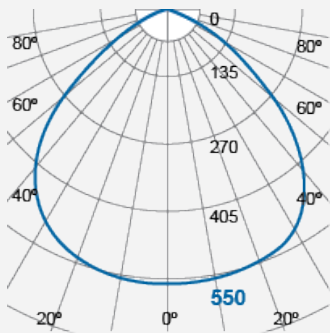

Product Code:

FFL70300v0

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	9.5
Beam Angle (°)	100
Tilting Angle (°)	160
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	>Ra80
Colour	Black (BK23)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	195
Application	Billboards, Gate areas, Pillar Facades, Signages
Performance Data	
Max. Luminous Intensity (cd)	550
Luminous Flux (lm)	900
Luminous Efficacy (lm/W)	95
Rated Life (hrs)	50000
IP Rating	IP65
Product Dimensions	
Length (mm)	86
Width (mm)	113
Height (mm)	115

Product Code: FFL70300v0

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

m	Lux	Ø cm
0.5	2200	119
1	550	238
1.5	244	358
2	138	477

Beam angle = 100°