NERO Waterproof Batten (Integrated) - Permanent Live Option

Silver

IP66 | IK08 | Class II

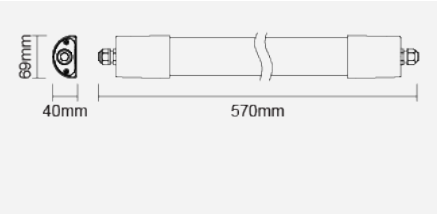

Product Code:

FOB70300v0-pl

Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	16
Beam Angle (°)	110
Colour Temperature (K)	Warmwhite (2800K), Coolwhite (4000K)
Colour Render Index (Ra)	≥Ra80
Colour Consistency (SDCM)	≤6
Colour	Silver (SV16)
Materials	Polycarbonate
Protection Class	Class II
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Weight (g)	372
Application	Car parks, Underground Areas, Warehouses, Workshops
Performance Data	
Max. Luminous Intensity (cd)	400
Luminous Flux (lm)	1500
Luminous Efficacy (lm/W)	94
Rated Life (hrs)	50000hrs at L70 B50 at Ta 25 ° C
Product Dimensions	
Length (mm)	570
Width (mm)	69
Height (mm)	40

MEGAMAN® 2005-2019. All Rights Reserved.
This document is for informational purpose only.
MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.
www.megaman.cc