

PAR30S 10.5W E27 WFL 2800K



Product Code:

LR3010.5-WFL-E27-2800K-230V

Electrical Data

Voltage (V)	220-240V
Frequency (Hz)	50/60
Power Factor	>0.5
Starting Time (sec)	<0.5
Warm-up Time Up to 100% of the Full Light Output (sec)	Instant full light


Product Data

Lamp Base	E27
Product Wattage (W)	10.5
Equivalent Wattage (W)	82
Reflector	PAR30S
Beam Angle (°)	WFL (35)
Colour Temperature (K)	Warmwhite (2800K)
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	<6
Dimmable	No
Energy Label	A
Operating Temperature	-30 ° C to +40 ° C
Switching Cycles (times)	>1000000
Mercury Content (mg)	N/A
Weight (g)	103
Application	Hospitality

Performance Data

Max. Luminous Intensity (cd)	850
Total Luminous Flux (lm)	700
Luminous Flux in 90 ° cone (lm)	635
Rated Life (hrs)	15000
Lumen Maintenance at the End of Lamp Life (%)	70

Product Dimensions

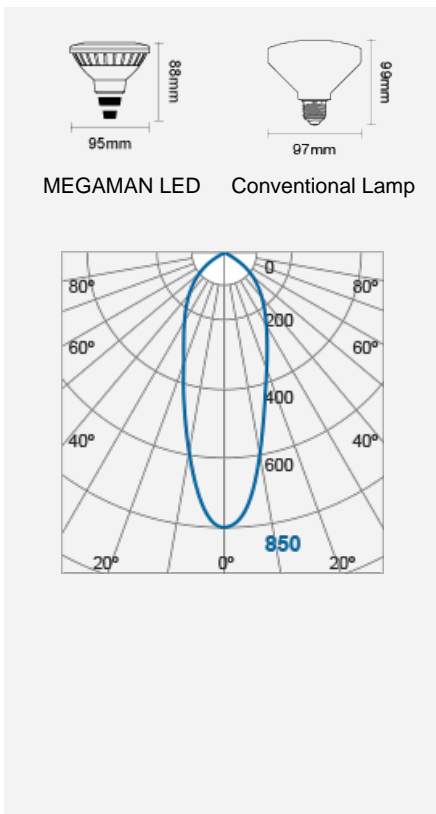

Product Code: LR3010.5-WFL-E27-2800K-230V


MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc

m	Lux	Ø cm
0.5	3400	32
1	850	63
1.5	378	95
2	213	126

Beam angle = 35°



Diameter (mm)	95
Length (mm)	88
Remarks:	
The rated lamp life, rated luminous flux in 90 ° cone, total luminous flux, rated beam angle and rated wattage are equivalent to their nominal values shown on product packaging. There is no measurable output from 180nm to 380nm, so the chart shows only 380nm to 800nm.	