
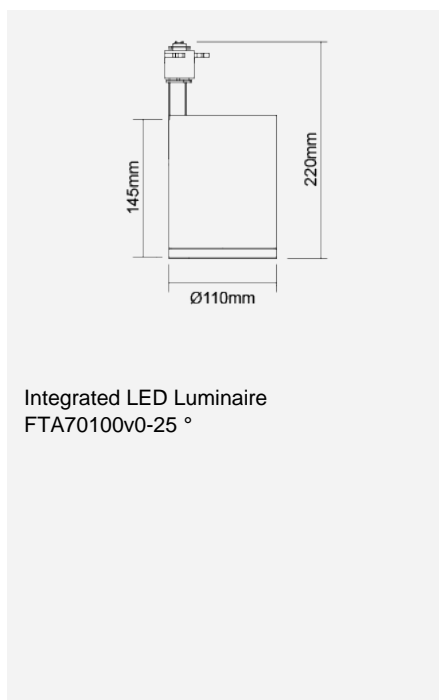


## MARCO Track Lighting (Integrated)



Product Code:

**FTA70100v0**


Electrical Data	
Voltage (V)	220-240V
Power Factor	>0.9
Product Data	
Product Wattage (W)	37
Beam Angle ( ° )	12, 25, 45
Rotating Angle ( ° )	330
Tilting Angle ( ° )	90
Colour Temperature (K)	Warmwhite (3000K), Coolwhite (4000K)
Colour Render Index (Ra)	Ra80
Colour Consistency (SDCM)	3
Colour	White (WH26), Silver (SV28), Black (BK24)
Materials	Aluminium
Protection Class	Class
Dimmable	No
Operating Temperature	-30 ° C to +40 ° C
Application	Hotels, Museums, Restaurants, Shop Lighting, Showrooms
Performance Data	
Max. Luminous Intensity (cd)	50000 [12 ° ], 18000 [25 ° ], 5400 [45 ° ]
Luminous Flux (lm)	3100 [3000K/12 ° ], 3300 [3000K/12 ° ], 3300 [3000K/25 ° /45 ° ], 3500 [4000K/25 ° /45 ° ]
Luminous Efficacy (lm/W)	84 [3000K/12 ° ], 89 [4000K/12 ° ], 89 [3000K/25 ° /45 ° ], 95 [4000K/25 ° /45 ° ]
Rated Life (hrs)	50000hrs at L70 B50 at Ta 25 ° C
Product Dimensions	
Diameter (mm)	110
Height (mm)	248

Product Code: FTA70100v0

MEGAMAN® 2005-2018. All Rights Reserved.  
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.



[www.megaman.cc](http://www.megaman.cc)

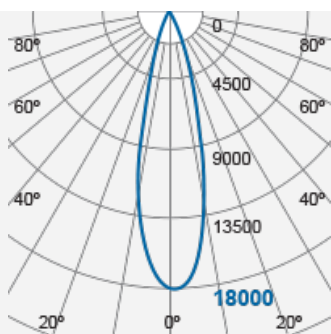

m	Lux	Ø cm
0.5	72000	22
1	18000	44
1.5	8000	67
2	4500	89

Beam angle = 25°

FTA70100v0-45 °

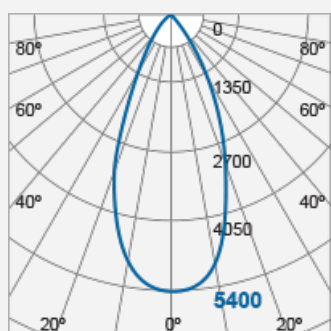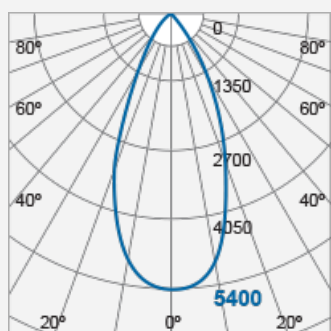

Remarks: Accessories:

LA10054 Spread lens



LA10055 Rectangular lens



LA10056 Honeycomb louver



LA10057 Barn doors



LA10058 Coloured filter (Red)



LA10059 Coloured filter (Yellow)



LA10060 Coloured filter (Blue)



LA10061 Coloured filter (Green)

